

LIST cable tester LCT 20



Features

- ◆ Designed to test sensor cable **SEC 20** before, during, and after on-site installation
- ◆ Ideal tool for trouble-shooting sensor cable **SEC 20** issues
- Mains-independent operation by using an integral rechargeable battery-pack
- ♦ Highly portable due to compact form factor, low weight and a shoulder-strap
- Automatic data-logging to PC

LCT 20 Indicators

◆ Operation:
 ◆ Measuring cycle:
 ◆ Charging:
 ◆ Battery-pack fault:

LED PWR green
LED SEC blue
LED CRG orange
LED ERR red

Connections

SEC: Via connection cable VK SEC and connection module CCM 3000 to sensor cable SEC 20
 USB: Connection to PC
 15 V DC: AC Power adapter

General Data

◆ Operating temperature: -10 °C ... +60 °C

◆ Dimensions: 206,0 x 168,0 x 36,0 mm (w x h x d, without shoulder-strap)

◆ Case material: Aluminium

Weight: 1,1 kg (including shoulder-strap)

♦ Sensor address range: 0 ... 1023

AC power adapter: Input: 100 – 240 V AC 50/60 Hz 0.5 A, Output: 15 V DC, 1200 mA
 Rechargeable battery-pack: Special NiMH battery-pack with an operating time span of about 18 hours

Ordering Information

♦ LIST cable tester LCT 20 Art.-no.: G00417

Scope of Delivery

- LCT 20 including shoulder-strap and AC power adapter
- Connection cable VK SEC
- ◆ Connection module CCM 3000
- USB connection cable, type A-B
- LISTmemory USB flash drive, including LCT 20 driver, software and documentation


Application Software


System prerequisites: Windows XP ServicePack 3, DotNet 2.0, and onwards



Dimensions



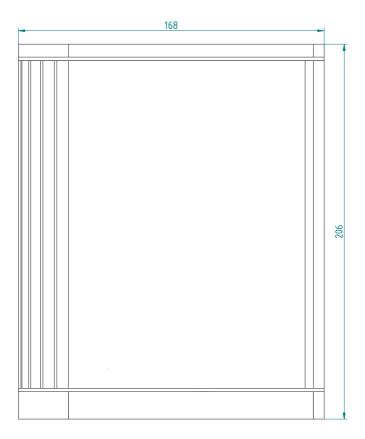



LISTEC GmbH Am Sandberg 34 D - 84424 Isen Germany

Tel.: +49 (0) 8083 5385-0 Fax.: +49 (0) 8083 5385-20 e-mail: info@listec-gmbh.de www.listec-gmbh.de

A company of the Swiss Securitas Group

Subject to change without prior notice!